



DeZURIK KUL URETHANE LINED KNIFE GATE VALVES





Design and Construction

DeZURIK's KUL Urethane Lined Knife Gate Valves are designed for on-off and throttling applications of abrasive slurry and dry abrasive materials. Urethane Lined Knife Gate Valves are 100% port area and are ideally suited for applications in mining, chemical and food industries.

Urethane Lined Knife Gate Valves are available in sizes 2-48" (50-1200mm) with temperature ratings from -40 to 175°F (-40 to 80°C) as standard. The cast ductile iron body is available in a variety of urethane compounds suitable for water, oil, food grade, phosphoric acid, petroleum and high temperature service to 265° F (130° C).

KUL valves feature a one-piece, cast-in-place liner that provides bi-directional, drip-tight shutoff to either 150 or 250 psi (1030 or 1720 kPa) CWP. Urethane Knife Gate Valves can also provide bi-directional dead-end service to the full pressure rating of the valve. All wetted surfaces are lined with urethane.

100% Port Area

The inside port diameter of the KUL valve is equal to ASME B36.10 standard pipe. The round port design allows high flow capacity and minimum pressure drop.

One-Piece, Cast-In-Place Liner

The urethane liner is cast in place to form a continuous liner throughout the entire body, chest, packing chamber and flange face area. The robust urethane seat portion of the one-piece liner covers the interior of the valve. The seamless urethane liner extends over the flange face to serve as the valve's flange gasket. No additional gaskets are required.



Exclusive Rounded Gate


A durable gate resists damage and allows higher pressure drops. Gate material options include stainless steels, including duplex and heat-treated stainless steel, and Hastelloy C. The gate is finish ground on all sides and edges to insure long packing and seat life. To increase packing life and provide a superior seal, the gate edges are rounded. The gate includes a knife-like bevel that pushes aside or cuts through thick slurries or solids in the flow. A high strength investment cast gate clip complements KUL's robust construction.

Stainless Steel Stem

All valves are furnished with a stainless steel stem as standard for extra corrosion resistance, long life and easy operation. The stem has single-lead threads to minimize wear and reduce operating torque requirements of the valve.

Reliable Long-Life Packing


Multiple packing material options ensure a tight seal with a minimum of packing gland pressure. Three rings of packing and a smooth uniform urethane lined chamber assure a tight seal.

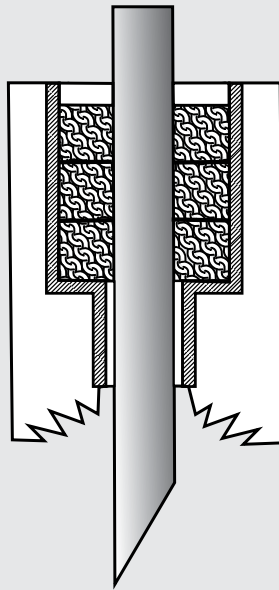

SMP
PTFE Square Braided Packing to 500°F (260°C) (pH Range: 0-14)

TDP
Dry Service, Dry PTFE Braided Packing with Solid PTFE Cord to 500°F (260°C) (pH Range: 0-14)

FGP
Food Grade Service to 450°F (232°C) (pH Range: 3-11)

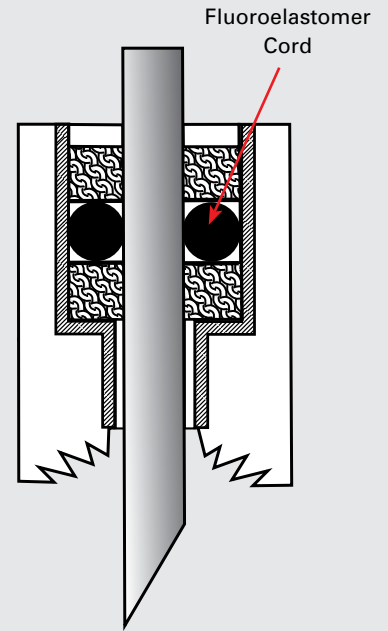

ASP
Self-adjusting PTFE Braided Packing with Fluoroelastomer Cord to 400°F (205°C) (pH Range: 0-14)

Choice of Actuators

The DeZURIK KUL Urethane Lined Knife Gate Valve is offered with a choice of handwheel, chainwheel, bevel gear, pneumatic or hydraulic cylinder, or electric motor actuators.

Corrosion Resistant Yoke Sleeve

A bronze yoke sleeve provides corrosion resistance and assures easy operation. An added grease fitting provides lubricant to the stem thread and yoke sleeve.

Heavy-Duty Superstructure

The standard actuator superstructure is available in carbon steel or stainless steel and is designed to stand up under the most difficult operating conditions. For valves mounted in horizontal installations, strengthened actuator legs are available.

Accessories

A wide variety of accessories are available including handwheel extensions, floorstands, lockouts and various cylinder actuator accessories for customizing the valve/actuator package to meet specific application requirements.



Sales and Service

For information about our worldwide locations, approvals, certifications and local representative:
Web Site: www.dezurik.com E-Mail: info@dezurik.com



250 Riverside Ave. N. Sartell, Minnesota 56377 • Phone: 320-259-2000 • Fax: 320-259-2227

DeZURIK, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing by DeZURIK, Inc. Certified drawings are available upon request.