

more sensors, more solutions

LED Diffused On-Axis Lights (75 mm)

CE

Features


- Diffused on-axis illumination provides uniform lighting for specular surfaces
- 75 mm x 75 mm light aperture
- The suggested field of view is 38 mm x 38 mm and the suggested standoff is 25 mm
- Choose white, blue, or red LED models
- Black anodized aluminum housing

Models

Models	Illumination Type	Color	Cable	Supply Voltage	Supply Current	Connections	
LEDW075N [†]		White 6500 K				12V dc models: Pin 1 = +V fan Pin 2 = dc common fan	
LEDB075N [†]	Continuous diffused light	Blue 470 nm	0.5 m (18") terminated	· /	12V dc ±10%	1.05 A max.	Pin 2 = dc common ran Pin 3 = dc common Pin 4 = $+V$
LEDR075N [†]		Visible Red 640 nm	with 9-pin D-sub connector (male pins)	with voltage regulation of ±1%		Power supply model PSA-12(E) or	
LEDR075N-H [†]	Continuous diffused light, high output	Red 660 nm	(male pins)		1.0 mA max.	PS2V-12(E) is recommended (see other side)	
LEDW075N-S [†]	Strobed	White 6500 K	1.8 m (6') terminated	24V dc ±10% with voltage regulation of ±1%	9.6 A max.	Pin 4 = +V Pin 1 = dc common	
LEDR075N-S [†]	diffused light	Red 640 nm	with 9-pin D-sub connector (male pins)		6.0 A max.	Use strobe control module model SCM (see other side)	

[†] These models are not stocked and are non-returnable.

Useful Life	White and blue models: 50,000 hours; Red models: 60,000 hours. Note: actual useful life of strobed lights depends on duty cycle			
Environmental Rating	IEC IP20; NEMA 1			
Operating Conditions	Temperature: 0° to +40°C (+32° to 104°F) Maximum relative humidity: 95% at 40°C (non-condensing)			

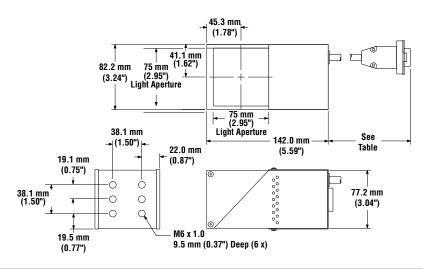

LED Diffused On-Axis Lights (75 mm)

Accessories							
	Continuous Power Supplies						
Models	Input	Input Cord	Output	Output Cable	Used with		
PSA-12	100-250V ac	North America (NEMA 5-15) Cont. Europe (Schuko CEE 7)	12V dc ±5% with voltage regulation of ±1% 3.5 A max.	1.8 m (6') Terminated with 9-pin D- sub connector (female pins)	Continuous types: LEDW075N LEDB075N LEDR075N LEDR075N-H		
PSA-12E	50/60 Hz						
PSC-24 [†]	100-250V ac 50/60 Hz	North America (NEMA 5-15)	24V dc ±5% with voltage	1.8 m (6') 2-wire Unterminated	SCM Strobe Control Module (see below)		
PSC-24E [†]		Cont. Europe (Schuko CEE 7)	regulation of ±1% 2.2 A max.				

Variable Power Supplies (see data sheet p/n 67449)							
Models	Input	Input Cord	Output	Output Cable	Used with		
PS2V-12 [†]	100-140V ac 60 Hz	North America (NEMA 5-15)	2-channels 6 - 12V dc 2 A max. per channel	6 - 12V dc	1.8 m (6') Terminated with	Continuous types: LEDW075N LEDB075N	-
PS2V-12E [†]	200-250V ac 50 Hz	Cont. Europe (Schuko CEE 7)		9-pin D-sub connector (female pins)	LEDB075N LEDR075N LEDR075N-H		

Strobe Control Module (see data sheet p/n 67448)						
Models	Input	Trigger Input	Output	Output Pulse Range	Used with	
SCM [†]	24V dc ±5% 2 A max.	5 - 12V dc pulse rising or falling (switch	2-channels 24V dc ±5%	5 to 1,300 microseconds	Strobed types: LEDW075N-S	1-
(Use Power Supply PSC-24 or PSC-24E)		selectable) 10 mA max.	9 A nominal per channel @ 60 Hz	meroseconas	LEDR075N-S	

Extension Cables						
Models	Length	Used with				
DB906 [†]	1.8 m (6')	Terminated both ends with 9-pin D-sub connector, for continuous lights	Continuous types: LEDW075N			
DB910 [†]	3.0 m (10'')	(one end male pins and opposite end female pins)	LEDB075N			
DB9Y [†]	1.8 m (6')	Y cable for powering 2 lights from one supply, for continuous lights	LEDR075N LEDR075N-H			
DB906S [†]	1.8 m (6')	Terminated both ends with 9-pin D-sub connector, for strobed lights	Strobed types: LEDW075N-S LEDR075N-S			
DB910S [†]	3.0 m (10')	(one end male pins and opposite end female pins)				
DB9YS [†]	1.8 m (6')	Y cable for powering 2 lights from one supply, for strobed lights				

[†] These models are not stocked and are non-returnable.



more sensors, more solutions

P/N 67439 rev. A

WARRANTY: Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.

.....

Banner Engineering Corp., 9714 Tenth Ave. No., Mpls., MN 55441 • Ph: 763.544.3164 • www.bannerengineering.com • Email: sensors@bannerengineering.com